

## Operating guide

1. Long press the OFF/ON button for 2 seconds to turn on the unit, the LED indicator is solid red.
2. Press the OFF/ON button to start recording. In recording mode, the LED indicator flashes alternately in red and green light. ( If you want to use the flashlight on top of the unit, double press the OFF/ON button to turn it on/off. Also, it allows to function recording and flashlight simultaneously.)
3. Short press the OFF/ON button once to stop recording, the LED indicator is solid red.
4. Long press the OFF/ON button again for 2 seconds to turn off the unit, the LED indicator will go off.
5. Transfer files to computer.  
Plug the USB cable to the unit and connect to the computer, then turn on the unit, it will enter the USB storage mode.  
Press the OFF/ON button again for 2 seconds to complete data transmission.  
When the power indicator is off, the USB cable can be pulled out.
6. Charge the unit via the USB interface.  
Quick Flashing Red Light: the unit is in low battery. (The unit will save data automatically to memory card while the battery is low or before the power is off.)  
Solid Green: the unit is charging (It allows to function recording while charging.)  
LED indicator turns off: fully charged.
7. Built-in SD memory card(8GB)  
Built-in SD memory card(8GB) has advantages of long recording time.  
With the remain memory storage runs out, the unit is unable to record a new audio data. The LED indicator is solid red.

## Highlights

- A Pen with Voice Recorder and Flashlight
- For Covert Audio Surveillance
- 8GB Internal Storage
- Powered by Rechargeable Battery
- 4 Hours of Continuous Recording
- Built-in USB Connector to Download Files



## Packing list

SR-MLP4  
USB cable  
User manual  
Warranty card

## Specifications

<b>Recording Media</b>	Built-in TransFlash card (8GB)
<b>USB Type-C/F</b>	IN voltage range MIN 3.5V, MAX 28V; IN operating voltage range, restricted by VDPM and VOVP MIN 4.45V, MAX 6.45V
<b>Record WAV</b>	16kHz/16bit
<b>USB</b>	Write speed 300KB/S, Read speed 400KB/S
<b>LED light</b>	0.1W; 15LM
<b>Battery</b>	170mAh Built-in rechargeable battery
<b>Operating time</b>	Only recording: 4 hours Only LED lighting: 5 hours Both recording and lighting: 2 hours
<b>Material</b>	Stainless steel
<b>Dimensions</b>	φ15.5*140mm
<b>Weight</b>	107g (3.77oz)

## Specifications

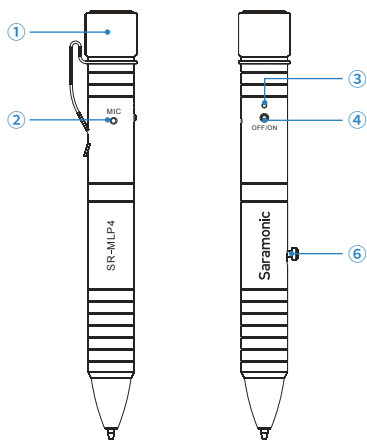

- ① LED light
- ② Microphone
- ③ LED indicator
- ④ OFF/ON button
- ⑤ USB Type-C port  
(For charging and data transmission)
- ⑥ Pen switch

## 操作指南

1. 长按电源键2秒，开启录音笔，指示灯状态为红灯常亮。
2. 按下电源键开始录音。在录音模式下，指示灯变为红绿灯交替闪烁。  
(如果需要使用手电筒功能，连续快速地按下电源键两次，即可开启/关闭功能。支持录音模式下，使用手电筒功能)
3. 短按电源键完成录音，指示灯状态为红灯常亮。
4. 使用完毕，再次长按电源键2秒，关闭录音笔，指示灯熄灭。
5. 通过USB Type-C数据线进行数据传输：  
将USB线连接电脑和录音笔，长按电源键2秒开启录音笔，进入USB存储模式。  
数据传输完成后，再次长按电源键2秒，待电源指示灯熄灭，即可拔出转接线。
6. 通过USB Type-C数据线进行充电：  
当录音笔处于低电量时，指示灯状态为红灯快闪  
(在使用过程中，录音笔的电量耗尽会自动关机并保存关机前的录音文件。)  
充电时，LED指示灯状态为绿色；(支持边充电边录音)  
充电完成时，LED指示灯熄灭。
7. 内置SD卡  
内置8G内存卡，支持长时间录音  
SD卡无剩余内存时，无法记录新的录音文件，指示灯状态为红灯常亮


## 产品特点

- 带手电筒功能的录音笔
- 隐蔽机身，方便记录
- 内置8GB内存卡
- USB Type-C充电
- 4小时续航时间
- USB Type-C数据线，用于传输录音数据

## 技术参数

存储方式	内置闪存卡 (8GB)
USB Type-C/F	电压范围最小3.5V，最大28V； 在运行电压范围内，受VDPM和VOVP限制 最小4.45V，最大6.45V
采样率	16kHz/16bit
USB	码流率 300KB/S 读取率 400KB/S
LED灯	0.1W; 15LM
电池	170mAh 内置锂电池
续航时间	录音模式: 4小时 LED手电筒模式: 5小时 录音模式和LED手电筒模式: 2小时
材质	不锈钢
尺寸	φ15.5*140毫米
重量	107g

## 包装清单

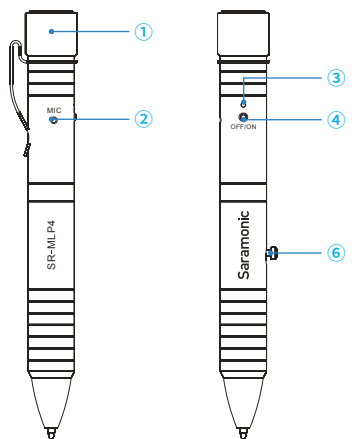

- ① 手电筒
- ② 麦克风
- ③ LED指示灯
- ④ 开关键
- ⑤ USB Type-C接口
- ⑥ 按笔组件

## 包装清单

SR-MLP4录音笔  
USB Type-C数据线